



# Keyboard Replacement

Written By: Felice Suglia





## TOOLS:

- [Phillips 0 Screwdriver](#) (1)
-

## Step 1 — Battery




- Unlock the latch for fixing the battery to the right.
- Unlock the fixing bolt from the battery to the left.
- Remove the battery pack from the slot.

## Step 2 — Keyboard






- Carefully detach the first clip of the bar with the ON / OFF button.
- Carefully detach the second clip of the bar with the ON / OFF button.
- And so on.

## Step 3

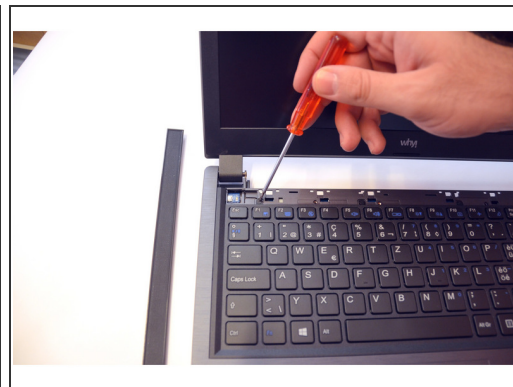

- Flip the laptop, then lift this bar
- The four screws that moor the keyboard then appear.
- Now unscrew the four screws.

## Step 4

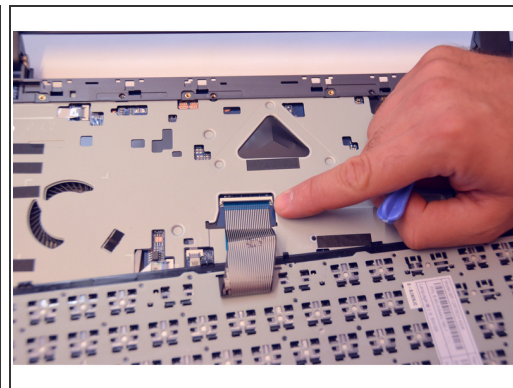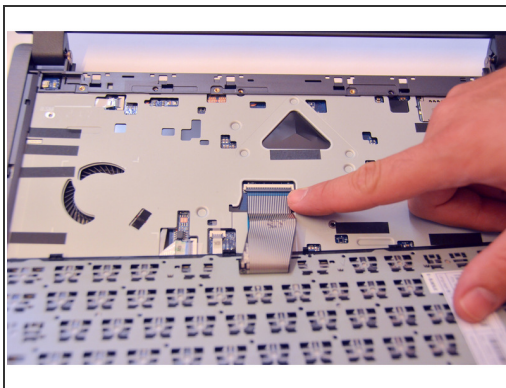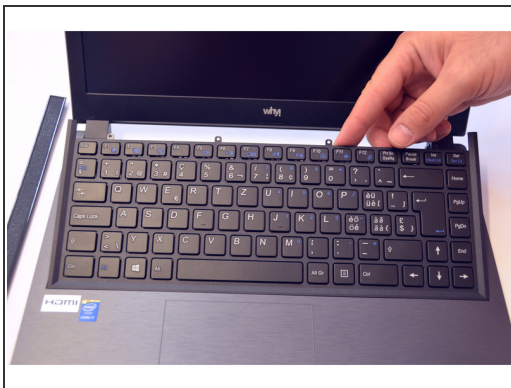

- Now slowly release the keyboard.
- Then reverse it.
- Now release scraps of a screwdriver the keyboard cable.

## Step 5



- Once released cable, lift the keyboard out of the slot.

Pour le remontage, suivre les instructions dans l'ordre inverse.

This document was last generated on 2017-06-20 12:36:54 AM.